



www.mesin77.com

Internal and external 5Gallon washing machine



Name	Model	Unit	Price (IDR)
Internal and external washing machine (600bph)	GDS-CH-6	1	175,000,000
Conveyor	SS304	5meter	28,000,000
Total			203,000,000

Internal washing machine process:

1, the barrel go into the machine by the conveyor belt which have set a counting detection, each line is 6 bottle by the detector.

2, When 6 barrels go into the machine, then pushing cylinder push the bottle into the clamping barrel station, and the washing cup seat above the barrel drop and fixed the bottle.

3, 6 barrels overturn 180 degrees by the stepping motor so that the bucket mouth down.

4, The internal and external brush inserted into the barrel rising in the role of the cylinder.


5, internal washing and washing brush work together under the action of the motor. Brush bottle revolving, at the same time, the clean water brush the barrel.

6, After setting time, the brush stops rotating, and the inner washing brush drops out of the barrel.

7, Overturn the barrel back to the mouth upward state.

8. Push the barrel back to the conveyor belt.

9, 6 bottles away from the washing station by conveyor, pure water washing pump start, washing the bucket outside. At the same time at the back of bucket go into the machine.

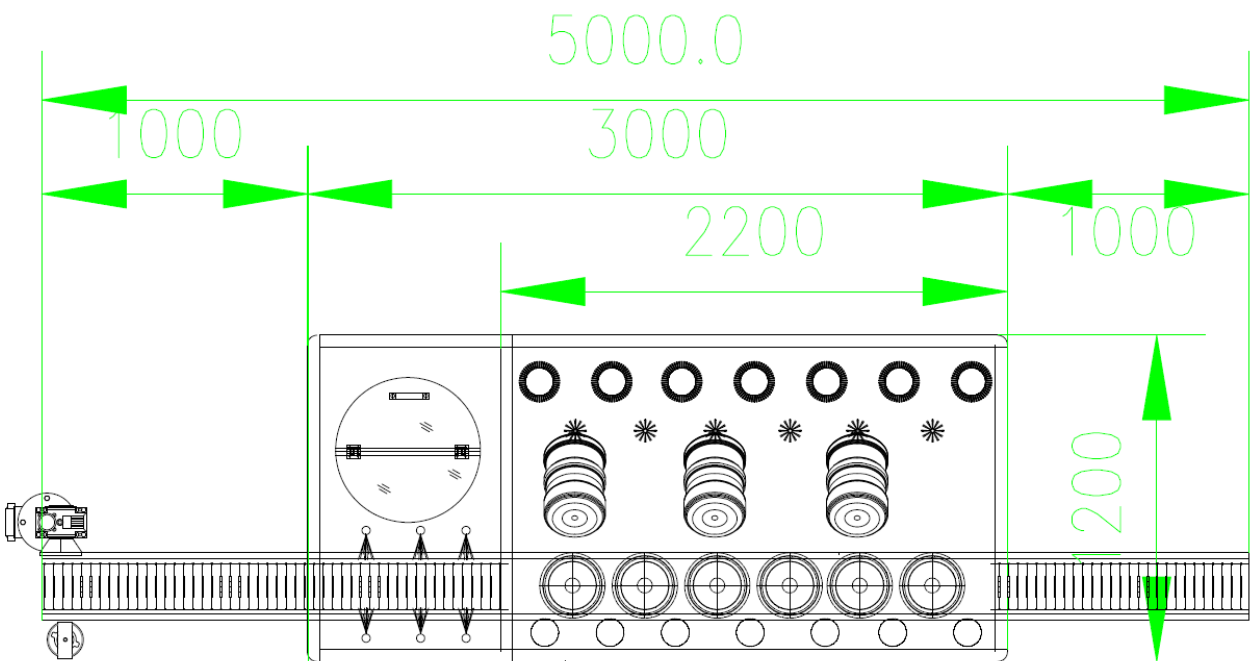

直线式6工位内外清洗机